

REFLASH TYAN FT77B7059 FOR IVY BRIDGE COMPATIBILITY

The IP address must be known in order to update Bios through IPMI

The first part of the process will be done from a bootable USB flash drive
The second part through IPMI

PREPARE

Create a bootable USB flash drive
Copy the files attached in the Flash drive

SETUP THE SYSTEM

- 1) Connect network
- 2) Install Jumper J18 (see picture 1)
- 3) Install Video card

REFLASH PART 1

- 1) Boot the system on USB flash drive
- 2) Run command f.bat
- 3) Choose option 1
- 4) After reflash system will stop

REFLASH PART 2

- 1) Copy the Bios file 7059V009.B10 on the drive of the PC which will be used
For network update
- 2) Connect to the WS from another machine using the IP address (Picture 2)

Login = root


Password = superuser

- Choose option :MAINTENANCE
- Choose BIOS UPDATE
- Choose ENTER UPDATE MODE et OK
- Select the BIOS file 7059V100.B10
- Choose UPLOAD
- Choose PROCEED until « Finished » « OK »

VERIFICATION

- 1) Remove J18 and video card
- 2) Start the system and check the Bios version FT79A-B7059 V100-B10

Picture 1

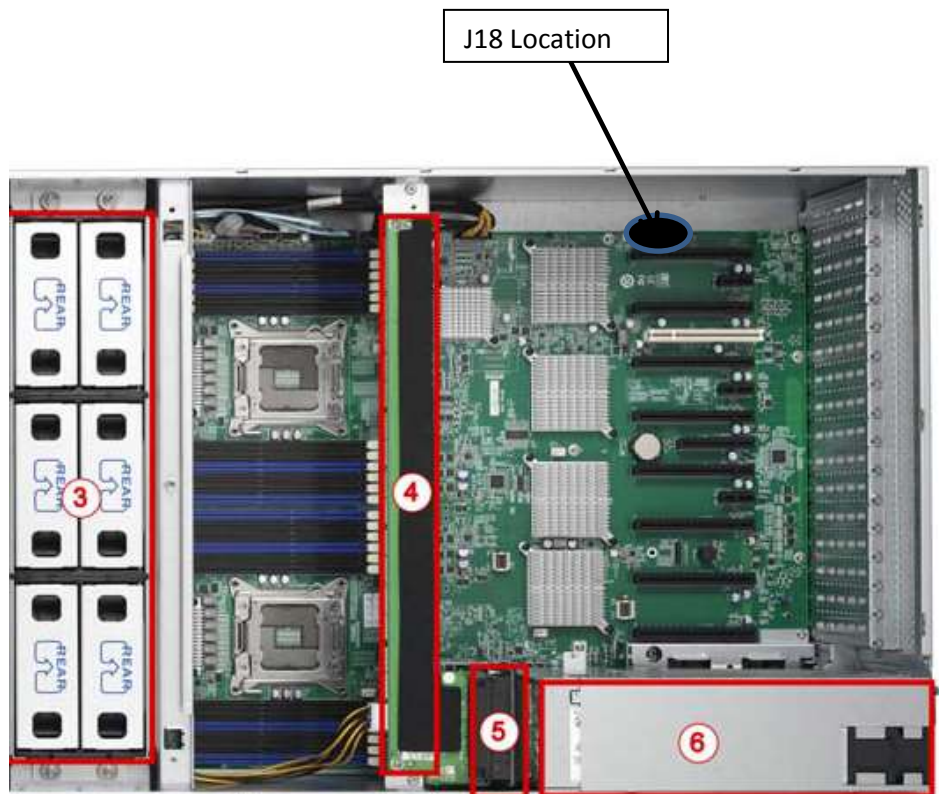

Picture 2

